

FIG. 1


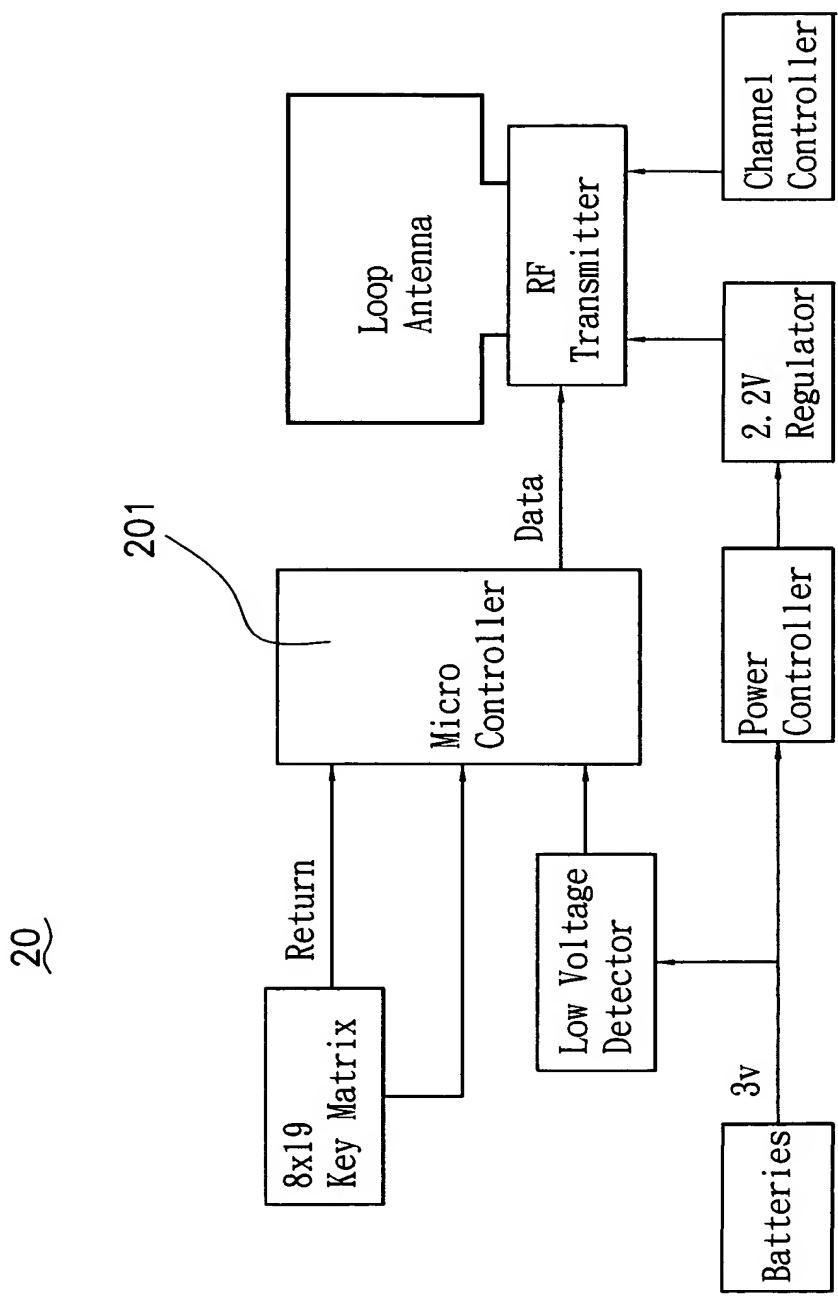


FIG. 2

FIG. 3

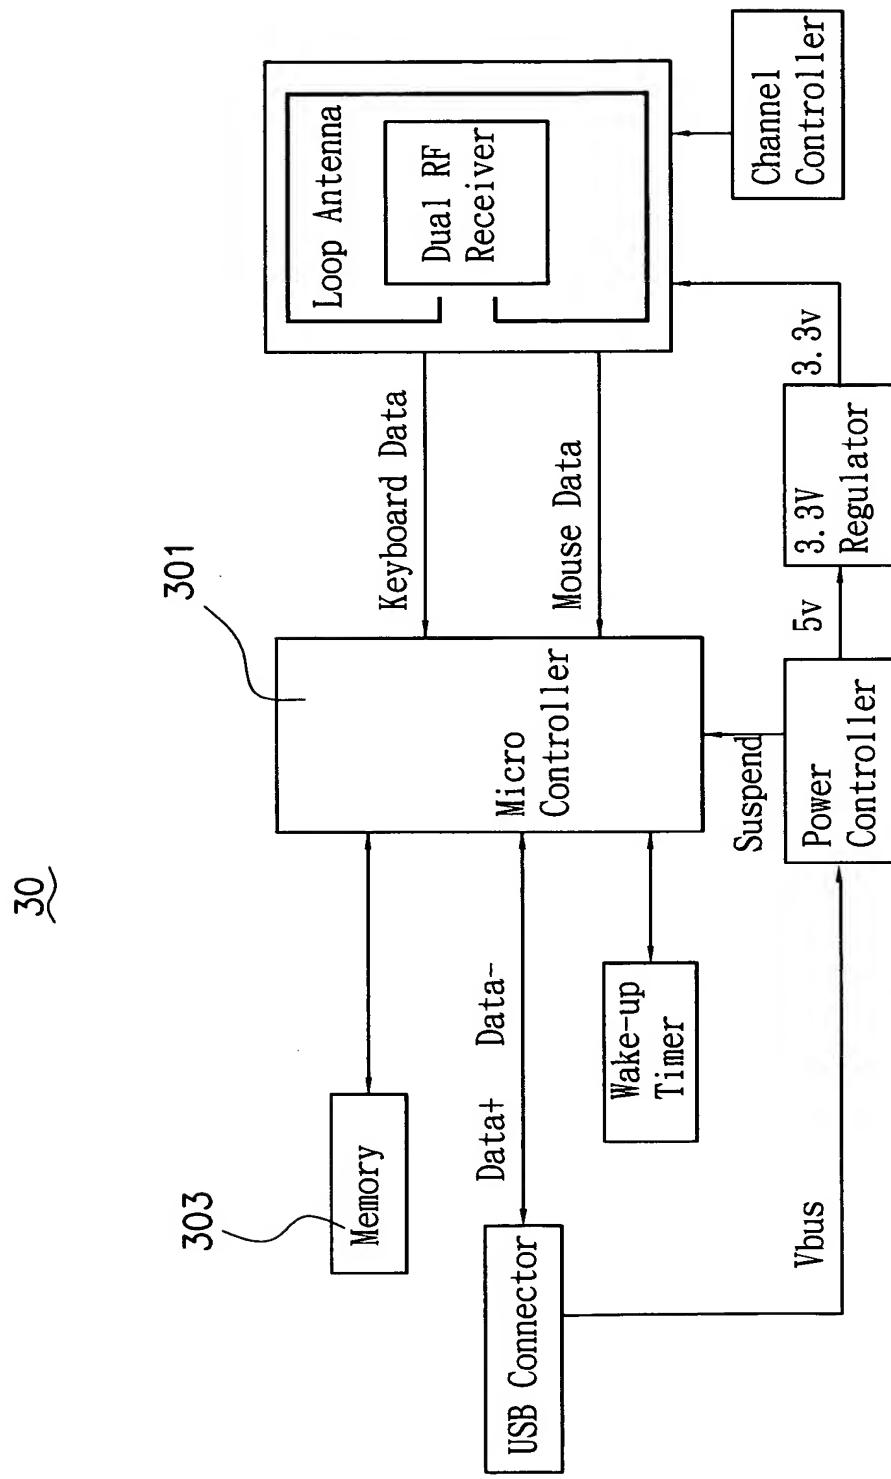

41

Storing a predetermined identification code in a memory of a wireless human receiving device

43

Sending a packet contained an identification code with same value as the predetermined code to the wireless human receiving device by the wireless human transmitting device, wherein the identification code is automatically generated by a micro controller of the wireless human transmitting device

45

Receiving the packet by the wireless human receiving device


47

Detecting if the wireless human receiving device can receive normally and reading the memory via executing program codes by the computer, and comparing the predetermined code to the read data and outputting a message of the wireless human input device being normally operated if a result being true after comparision

49

Directing a user to change a new identification code via executing the program codes by the computer

FIG. 4

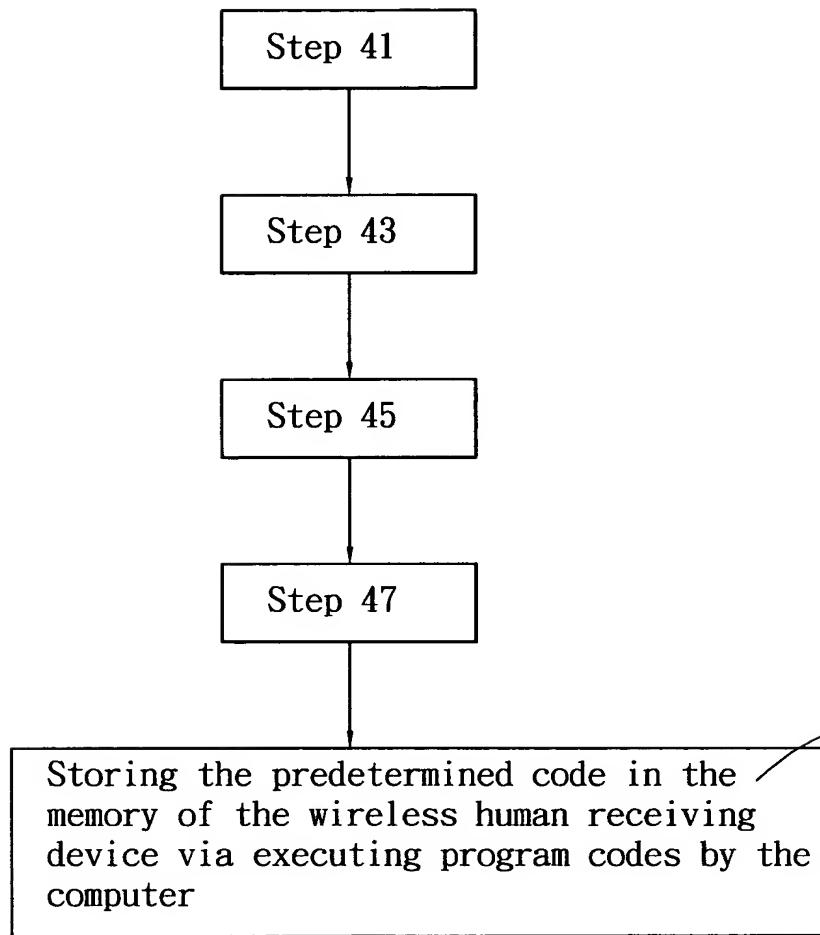

51

FIG. 5

61

The wireless human input device has been
set up successfully and is working
normally

FIG. 6